


WAT-2300



動作溫度：	-10 - +50°C
保存溫度：	-30 - +70°C
動作/保存濕度：	95% RH 以下
鏡頭座：	CS-mount
重量：	Approx. 130g

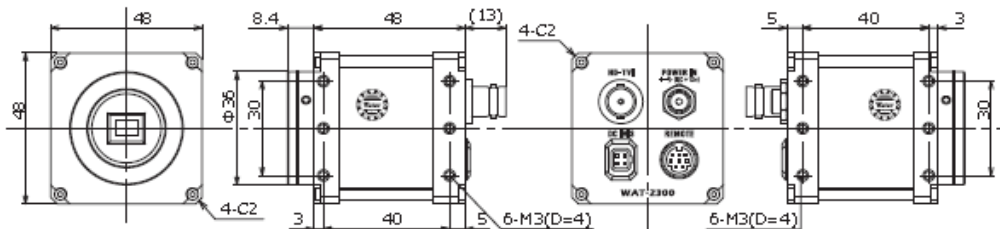


規格

攝像素子：	1/2.8 型 CMOS image sensor
總畫素：	1952(H) x 1236(V)
有效畫素：	1080i / 1080p : 1920(H) x 1080(V) / 720p:1280(H) x 720(V)
Unit cellsize：	2.8 μ m x 2.8 μ m
攝像方式：	RGB+W array mosaic filters on chipar
同步方式：	內同步
掃描方式：	Progressive
信號輸出：	HD - TVI
輸出格式：	1080 / 30p , 720 / 25p , 720 / 60p , 720 / 50p , 720 / 30p , 720 / 25p
最低照度：	0.1 lx. F1.2
信號雜訊比：	大於 50dB
功能設置：	SOD (顯示器) / RS-232 (控制器)
AE mode：	E.I + AGC, AGC, FL, MANUAL
快門速度：	OFF, FL, 1/200, 1/500, 1/1000, 1/2000, 1/5000, 1/10000 秒
閃爍模式：	AUTO . 50Hz . 60Hz . OFF
白平衡：	ATW . PWB . Preset, MWB
自動增益控制 :(AGC)	高, 中, 低
手調增益控制 :(MGC)	0 - 30dB
Gamma 特性：	開 / 關
Noise reduction 降噪：	高, 中, 低, 關
寬動態範圍：	開(ATR) / 關
鏡頭光圈：	DC
逆光補償：	開 / 關
白點校正功能：	最多 1023 點
除霧功能：	開 / 關
鏡像倒像：	ON (H - FLIP, V - FLIP, ROTATE) / OFF
電源電壓：	DC+12V \pm 10%
消耗電流：	1.92W / 160mA (720p60)


Accessories Options

CS-mount lenses

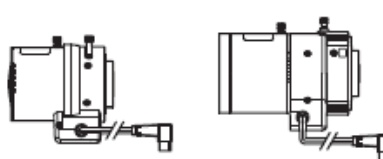


M13VG288IR M13VG850IR

Miniature lenses / Mount adaptors





M2520BC-12 M2920BC-12
M3718BC-12 M4318BC-12 29PMA-M12-125
M0620BC-12 M0820BC-12

C-mount adaptor




34CMA-R


C-mount lenses
※Not in our lineup

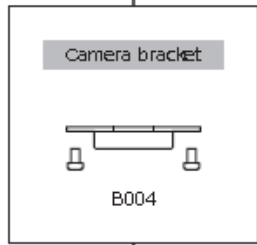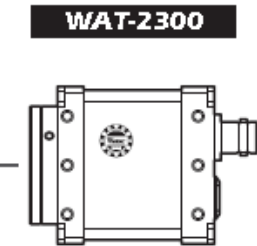

Stands



MS50 WH-31 WH-11 WH-21




WAT-2300

VIDEO OUT (BNC)
POWER IN (DC12V)


REMOTE

RS-232




RC-02

Cable




3C2V (BNC/BNC)

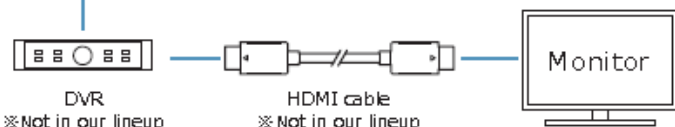


DVR ※Not in our lineup
HDMI cable ※Not in our lineup
Monitor ※Not in our lineup

Power supply adaptors




SWI12-12-N-P5 SWI12-12-E-P5

Cable




CB-03



PC
PC
※Not in our lineup

Water resistant camera housing / Mounting brackets

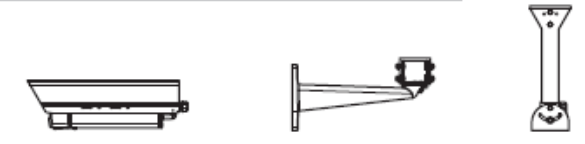

VCHO-15S WH-6N PTP-300