


WAT-2400S 1/2.8"

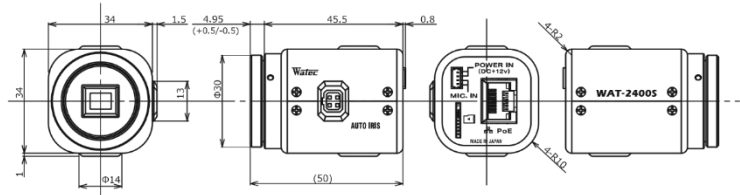

鏡像倒影：	OFF, V-FLIP, H-FLIP, HV-FLIP
動態偵測：	OFF/ON 四個區域可任意配置
ONVIF：	Profile S
Supported protocols：	TCP/IP, UDP/IP, RTP(RTSP), RTSP SNTP, HTTP, FTP, DHCP, DNS
Interface：	RJ4S(10BASE-T, 100BASE-TX), 4P Connector(MIC, IN, POWERIN), Auto iris: microSD (Recommendrd:SDHC/SDXC standard MLC type, Speed CLASS 10 or more, Capacity of 128GB or less)
電源電壓：	PoE+48V(IEEE802.3af), DC+12-36V*+12V is recommended for DC input
消耗電流：	1.92W/40mA (PoE+48V), 1.56W/130mA (DC+12V)
動作溫度：	0° ~ +50°C
保存溫度：	-30° ~ 70°C
動作/保存溫度：	95% RH 以下 (無結霜)
鏡頭座：	CS-MOUNT (可調焦點)
重量：	約 80g
配件：	4P cable, 六角螺絲刀, Clamp filter

規格

攝像素子：	1/2.8 型 CMOS image sensor	
總畫素：	1945(H) x 1097(V)	
Unit cellsize：	2.9µm(H) x 2.9µm(V)	
影像系統：	RGB Primary color bayer arrangement mosaic filter on chip	
同步方式：	內同步	
掃描方式：	Progressive	
輸出大小：	1920x1080, 1280x720, 800x600, 704x480, 704x400, 640x480, 640x360, 320x240	
最大速率：	30fps	
視頻壓縮：	H 264, MJPEG	
最低照度：	0.007 lx. F1.2 (AGC HIGH:720dB, Shutter=OFF)	
信號雜訊比：	-	
功能設置：	Browser	
AE mode：	Fixed	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/25, 1/50, 1/100, 1/200, 1/400, 1/800
		1/2000, 1/4000, 1/8000, 1/5000 1/1600, 1/3200, 1/6400, 1/12800
	EI	1/30000 (sec.)*1 1/25600 (sec.)*2
		1/30 – 1/30000(sec.)*1 1/25 – 1/25600 (sec.)*2 X32 – 1/30000 (sec.)*1 *3 X32 – 1/25600 (sec.)*2 *3
白平衡：	ATW. PWB. 手動. 預設 (4 種)	
自動增益控	ON	0 - 72dB
制 (AGC)	OFF	0dB
降噪：	3DNR OFF/ON (可調整水平)	
寬動態範圍：	WDR OFF/ON (可調整水平)	
光圈鏡頭：	DC (自動判別)	
鏡像反轉：	關/開 (H-翻轉, V-翻轉)	
白點校正功能：	ON	
清晰度：	級別調整	
除霧功能：	OFF/ON (級別調整)	
隱私遮蔽：	16 masks	

Accessories Options

CS-mount lenses

M13VG288IR M13VG850IR
AG3Z2812FCS-MPWIR AG4Z1214FCS-MPIR



Miniature lenses / Mount adaptors

M2520BC-12 M2920BC-12
M3620BC-12 M0620BC-12 28MMA-M12-155
M0816BC-12
M1616BC-12 28MMA-M12-140

C-mount lenses

*Not in our lineup
30CMA-R

WAT-2400S




microSD
*Not in our lineup

Stands

MS50 WH-11
WH-21 WH-31

Water resistant camera housing / Mounting brackets

VCHO-15S
WH-6N PTP-300

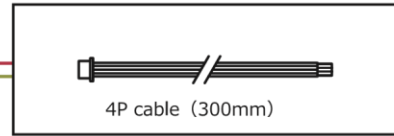

POWER IN (DC+12-36V)

MIC. IN

Cable with connectors

CB-06

LINE IN

POWER IN (DC+12V)

CB-07

Power supply adaptor

SWI12-12-N-P5
SWI12-12-E-P5

MIC. IN

*Use the MIC, which is a plug-in power type.

LAN cable
(Shielded cable recommended)
*Not in our lineup

Clamp filter

*Use the PoE hub or NVR supporting IEEE802.3af for the PoE power supply

Network hub
*Not in our lineup

NVR
*Not in our lineup

PC
VMS / Browser / Others
*Not in our lineup