


WAT-660E G3.8 1/4" Miniature Camera

Compact square camera with built-in lens



- Min.illumination 0.002 lx F2.0 (AGC ON=42dB, Shutter=OFF)
- Wide input voltage range (*DC 5V to 12V)
- Various optional M12 lenses available ※Glass lenses and pinhole lens are not interchangeable

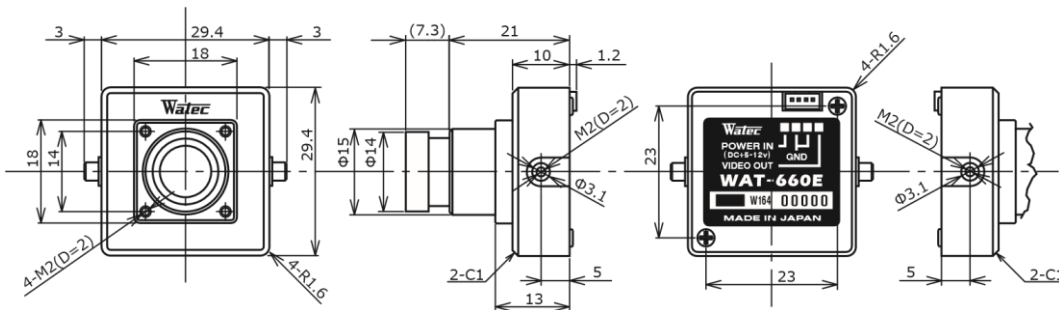

規格

視頻標準		EIA	CCIR
攝像素子		1/4 CMOS image sensor	
總畫素		1945(H) x 1097(V)	
Unitcell size		5.6μm × 5.6μm	
同步方式		內同步	
掃描方式		Progressive	
視頻輸出		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
解析度(H)		More than 480TVL (Center)	
最低照度 :		0.0002lx. F2.0 (AGC HIGH=42dB, Shutter=OFF)	
信號雜訊比 :		More than 52dB (AGC OFF=0dB, γ=1.0)	
功能設置 :		可通過瀏覽器設置	
AE mode	Fixed	-	
	EI	1/60 – 1/100000 sec.	1/50 – 1/100000 sec.
AGC	ON	0 - 42 dB	
	OFF	-	
Gamma 特性		γ≒0.45	
Video leve:		100 IRE	
背光補償		BLC	
Interface		4P connector (Composite Video, Power in)	
電源電壓		DC+5V – 12V	
消耗電流		0.45W/90mA (DC+5V), 0.45W/37.5mA (DC+12V)	
動作溫度		-10° ~ 50°C	
保存溫度		-30° ~ 70°C	
動作/保存溫度		95% RH 以下 (無結霜)	
鏡頭座		3820BC-12 (f3.8 F2.0)	
重量		約 33g	
配件		4P cable	

Accessories
 Options

WAT-660E (G3.8)

Miniature lenses



2520BC-12



2920BC-12



3820BC-12
(Standard)



0625BC-12




0820BC-12







1220BC-12



M1616BC-12



2540EX014-M12

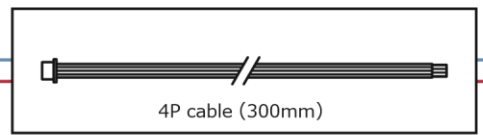

4P cable (300mm)

VIDEO OUT

POWER IN (DC5-12V)

Extenders

EX005-M12-2

EX010-M12-2

Camera bracket

B001

Stand

MS50

Cable with connectors

CB-01

Power supply adaptors

SWI12-12-N-P5

SWI12-12-E-P5

Cable

1.5C2V (BNC/BNC)

3C2V (BNC/BNC)

3C2V (BNC/RCA)

VIDEO OUT (BNC)

POWER IN (DC12V)

VIDEO OUT (BNC)

VIDEO OUT (RCA)



Monitor

※Not in our lineup