


WAT-933

1/2.8" Compact High Sensitivity, Network B&W

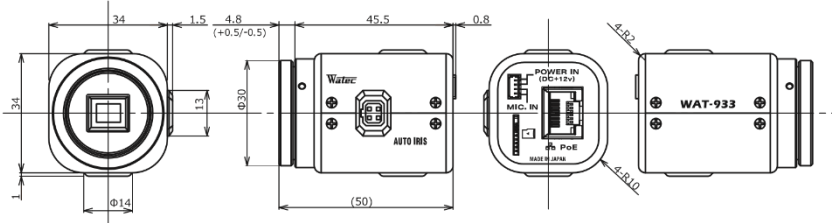

ONVIF :	Profile S
Supported protocols :	TCP/IP, UDP/IP, RTP(RTCF), RTSP
	SNTP, HTTP, FTP, DHCP, DNS
Interface :	RJ4S(10BASE-T, 100BASE-TX), 4P Connector(MIC, IN, POWERIN), Auto iris:
	microSD (Recommendrd:SDHC/SDXC standard MLC type, Speed CLASS 10 or more, Capacity of 128GB or less)
電源電壓 :	PoE+48V(IEEE802.3af), DC+12-36V*+12V is recommended for DC input
消耗電流 :	1.92W/40mA (PoE+48V), 1.56W/130mA (DC+12V)
動作溫度 :	0° ~ +50°C
保存溫度 :	-30° ~ 70°C
動作/保存溫度 :	95% RH 以下 (無結霜)
鏡頭座 :	CS-MOUNT (可調焦點)
重量 :	約 80g
配件 :	4P cable, 六角螺絲刀, Clamp filter

規格

攝像素子 :	1/2.8 型 CMOS image sensor		
總畫素 :	1945(H) x 1097(V)		
Unitcell size :	2.9μm x 2.9μm		
同步方式 :	內同步		
掃描方式 :	Progressive		
輸出大小 :	1920x1080, 1280x720, 800x600, 704x480, 704x400, 640x480, 640x360, 320x240		
最大速率 :	30 fps		
視頻壓縮 :	H.264, MJPEG		
最低照度 :	0.0001 lx. F1.4 (AGC HIGH=72dB, Shutter=OFF)		
信號雜訊比 :	-		
功能設置 :	可通過瀏覽器設置		
AE mode :	Fixed	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/15000,	1/25, 1/50, 1/100, 1/200, 1/400, 1/800, 1/1600, 1/3200, 1/6400, 1/12800,
		1/2000, 1/4000, 1/8000, 1/5000,	1/25600 (sec.) *2
	EI	1/30 – 1/30000 (sec.) *1	1/25 – 1/25600 (sec.) *2
		X32 – 1/30000 (sec.) *1 *3	X32 – 1/25600 (sec.) *2 *3
白平衡 :	ATW, PWB, 手動, 預設 (3000K, 5000K, 8000K)		
自動增益控制 : (AGC)	ON	0 - 72dB	
	OFF	0 dB	
降噪 :	30DNR OFF/ON (Level adjustable)		
鏡頭光圈 :	DC		
背光補償 :	BLC, HSBLC		
白點校正功能 :	ON		
清晰度 :	級別調整		
除霧功能 :	OFF/ON (級別調整)		
隱私遮蔽 :	16 masks		
鏡像倒影 :	OFF, V-FLIP, H-FLIP, HV-FLIP		
動態偵測 :	OFF/ON 四個區域可任意配置		

Accessories Options

CS-mount lenses

M13VG288IR M13VG850IR
AG3Z2812FCS-MPWIR AG4Z1214FCS-MPIR



Miniature lenses / Mount adaptors

M2520BC-12 M2920BC-12
M3620BC-12 M0620BC-12 28MMA-M12-155
M0816BC-12
M1616BC-12 28MMA-M12-140

C-mount lenses
*Not in our lineup

C-mount adaptor
30CMA-R

WAT-933



microSD
*Not in our lineup

Stands

MS50 WH-11
WH-21 WH-31

Water resistant camera housing / Mounting brackets

VCHO-15S WH-6N PTP-300

4P cable (300mm)

POWER IN (DC+12-36V)

MIC. IN

Cable with connectors

CB-06

LINE IN

POWER IN (DC+12V)

CB-07

Power supply adaptor



SWI12-12-N-P5



SWI12-12-E-P5

MIC. IN

*Use the MIC, which is a plug-in power type.



LAN cable
(Shielded cable recommended)
*Not in our lineup

Clamp filter

*Use the PoE hub or NVR supporting IEEE802.3af for the PoE power supply

Network hub
*Not in our lineup

NVR
*Not in our lineup

PC
VMS / Browser / Others
*Not in our lineup