


WAT-933

1/2.8" Compact High Sensitivity, Network B&W

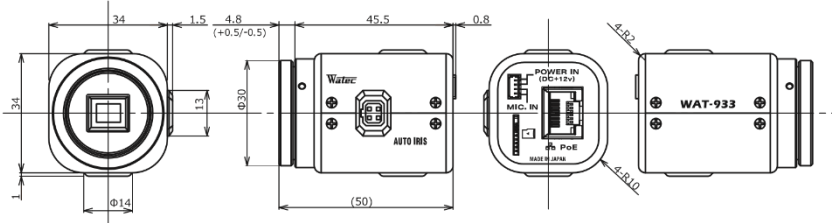

ONVIF :	Profile S
Supported protocols :	TCP/IP, UDP/IP, RTP(RTCF), RTSP
	SNTP, HTTP, FTP, DHCP, DNS
Interface :	RJ4S(10BASE-T, 100BASE-TX), 4P Connector(MIC, IN, POWERIN), Auto iris:
	microSD (Recommendrd:SDHC/SDXC standard MLC type, Speed CLASS 10 or more, Capacity of 128GB or less)
电源电压 :	PoE+48V(IEEE802.3af), DC+12-36V*+12V is recommended for DC input
消耗电流 :	1.92W/40mA (PoE+48V), 1.56W/130mA (DC+12V)
动作温度 :	0° ~ +50°C
保存温度 :	-30° ~ 70°C
动作/保存温度 :	95% RH 以下 (无结霜)
镜头座 :	CS-MOUNT (可调焦点)
重量 :	约 80g
配件 :	4P cable, 六角螺丝刀, Clamp filter

规格

摄像素子 :	1/2.8 型 CMOS image sensor	
总画素 :	1945(H) x 1097(V)	
Unitcell size :	2.9μm x 2.9μm	
同步方式 :	内同步	
扫描方式 :	Progressive	
输出大小 :	1920x1080, 1280x720, 800x600, 704x480, 704x400, 640x480, 640x360, 320x240	
最大速率 :	30 fps	
视频压缩 :	H.264, MJPEG	
最低照度 :	0.0001 lx. F1.4 (AGC HIGH=72dB, Shutter=OFF)	
信号杂讯比 :	-	
功能设置 :	可通过浏览器设置	
AE mode :	Fixed	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/15000, 1/2000, 1/4000, 1/8000, 1/5000, 1/25600 (sec.) *2
	EI	1/30 - 1/30000 (sec.) *1, X32 - 1/30000 (sec.) *1 *3, 1/25 - 1/25600 (sec.) *2, X32 - 1/25600 (sec.) *2 *3
白平衡 :	ATW, PWB, 手动, 预设 (3000K, 5000K, 8000K)	
自动增益控制 : (AGC)	ON	0 - 72dB
	OFF	0 dB
降噪 :	30DNR OFF/ON (Level adjustable)	
镜头光圈 :	DC	
背光补偿 :	BLC, HSBLC	
白点校正功能 :	ON	
清晰度 :	级别调整	
除雾功能 :	OFF/ON (级别调整)	
隐私遮蔽 :	16 masks	
镜像倒影 :	OFF, V-FLIP, H-FLIP, HV-FLIP	
动态侦测 :	OFF/ON 四个区域可任意配置	

Accessories Options

CS-mount lenses

M13VG288IR M13VG850IR
AG3Z2812FCS-MPWIR AG4Z1214FCS-MPIR



Miniature lenses / Mount adaptors

M2520BC-12 M2920BC-12
M3620BC-12 M0620BC-12 28MMA-M12-155
M0816BC-12
M1616BC-12 28MMA-M12-140

C-mount lenses
*Not in our lineup

C-mount adaptor
30CMA-R

WAT-933



microSD
*Not in our lineup

Stands

MS50 WH-11
WH-21 WH-31

Water resistant camera housing / Mounting brackets

VCHO-15S WH-6N PTP-300

4P cable (300mm)

POWER IN (DC+12-36V)

MIC. IN

Cable with connectors

CB-06

LINE IN

POWER IN (DC+12V)

Power supply adaptor

SWI12-12-N-P5
SWI12-12-E-P5

MIC. IN

*Use the MIC, which is a plug-in power type.

CB-07

LAN cable
(Shielded cable recommended)
*Not in our lineup

*Use the PoE hub or NVR supporting IEEE802.3af for the PoE power supply

Clamp filter

Network hub
*Not in our lineup

NVR
*Not in our lineup

PC
VMS / Browser / Others
*Not in our lineup