


WAT-01U2

●●小型 高解析 USB2.0 攝像機●●



- Compact design (32 x 32mm) with CS lens mount and light weight
- 1/2.8-inch megapixel CMOS image sensor achieves the effective pixels 1984(H) × 1105(V)
- The internal ISP (Image Signal Processor) ensures optimal image quality depending on the usage environment
- USB Video Class & USB Bus Power (plug & play)
- Simple viewer software with features to change the camera settings and capture images.

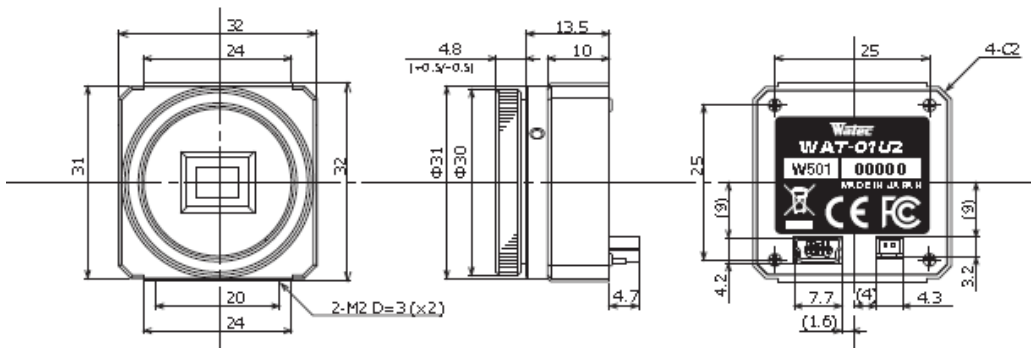

規格

攝像素子：	1/2.8 型 CMOS image sensor	
有效畫素：	1984(H) x 1105(V)	
同步方式：	2.8μm × 2.8μm	
攝像方式：	RGB primary color bayer arrangement mosaic filters on chip	
同步方式：	內同步	
掃描方式：	Progressive	
輸出尺寸：	160×120,176×144,320×240,640×480,1280×720,1280×800,1280×1024,1920×1080	
最大視頻	30fps	
信號輸出:	USB Mini-B, USB Video Class (Compatible)	
最低照度：	0.25 lx. F1.4, (1/30s),	
AE 手調	電子快門	1/15, 1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000 秒
	電子光圈	1/30 ~ 1/8000 秒 (當使用慢速快門:1/15~1/8000 秒)
白平衡	ATM	2800 ~ 9500K
	MWB	2800 ~ 6500K
自動增益控制 :(AGC)	0 ~ 42dB	
手動增益控制 :(MGC)	0 ~ 24dB (25 段階)	
Gamma 特性：	ON / OFF	
逆光補償：	ON (Center) / OFF	
電源電壓：	DC+5V (Supplied by the USB bus)	
消耗電流：	0.6W (120mA)	
動作溫度：	-10 - +50°C	
保存溫度：	-30 - +70°C	
動作/保存濕度：	95% RH 以下	
鏡頭座：	CS-mount (可調焦點)	
電線長度：	Shorter than 3.0m recommended	
重量：	約 35g	

Accessories Options

